We'll give it to you straight...

The IBM PPS II 2390 and 2391: Two dot matrix printers that do it all — reliably

The IBM® Personal Printer Series II (PPS II) 2390 and 2391. Brought to you by Lexmark,™ the company behind IBM Personal Printers. Two 24-wire dot matrix printers — one narrow-carriage, one wide-carriage — that print letters and labels with scarcely a pause. Envelopes, forms and receipts with equal ease. Two dot matrix printers with virtually straight paper paths for exceptional reliability.

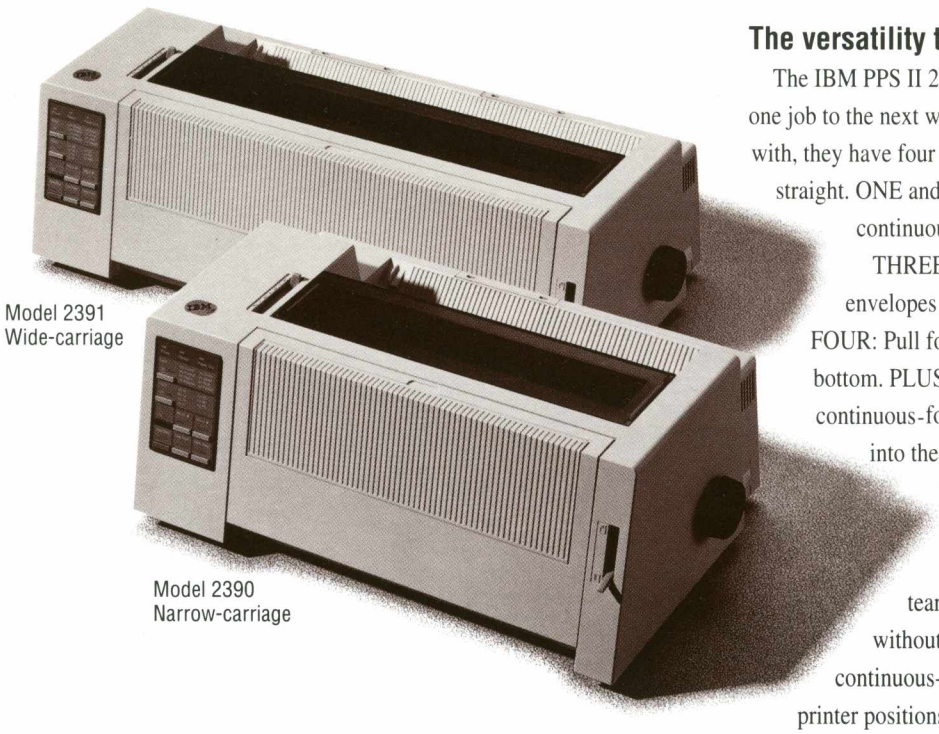

Model 2391
Wide-carriage

Model 2390
Narrow-carriage

The versatility to do more

The IBM PPS II 2390 and 2391 move from one job to the next without a hitch. To begin with, they have four paper paths — all virtually straight. ONE and TWO: Push or pull continuous forms through a front slot. THREE: Feed cut sheets and envelopes through a second front slot. FOUR: Pull forms through from the bottom. PLUS, a fifth path lets you stack continuous-forms paper in the rear to feed into the front. That's versatility.

There's more. "Rip and run" (also known as "document on demand") means you can tear off a page of printed data without wasting a sheet of continuous-forms paper — and the printer positions the paper at the top of the next form.

Ease of use to enhance productivity

Start with a switchless setup that gets you working fast. Then, the control panel is so easy to use you don't need a manual to figure it out. Select fonts and pitches with single-touch buttons; if you wish, you can protect the ones you're using with the font/pitch lock. Keep other users from changing the font, pitch and format you want with the panel disable mode.

If you think all that's easy, check out the ribbon. It simply snaps in and out — the ink never touches your fingers.

It's even easier to load the paper. The auto load assist senses the cut sheet and automatically pulls it through to the first writing line. And to move back and forth between forms and cut sheets? Just park the paper and flip a switch.

Compatibility to fit every environment

The IBM PPS IIs team up perfectly with any IBM PC or PS/2® system — or any other IBM-compatible computer. The standard Proprinter® and Epson® emulation means you can use them easily with the most popular software programs.

More compatibility — all IBM PPS II printers use the same high-quality, reinking ribbon.

Good looks, fast moves, nice price

The PPS IIs have it all:

- Eight fonts — including six letter-quality typefaces — and seven pitches
- High speeds — including FastDraft (200 characters per second at 10 characters per inch), draft (180 cps at 10 cpi), and letter-quality (60 cps at 10 cpi)
- Large buffer — 32K buffer standard
- An extremely competitive price

The IBM PPS IIs stand out with unbeatable performance and value.

Options, options, options

- Auto Sheet Feed (narrow or wide)
- RS232/RS422 Serial Interface Module
- 32K Non-Volatile Download Memory
- 32K Volatile Download Memory
- Font Download Program, including enhanced letter-quality fonts

At your service

Both IBM Personal Printer Series II dot matrix printers are backed by a two-year limited warranty.

IBM Personal Printer Series II 2390 and 2391
Speeds and feeds

Technology	24-wire dot matrix
Dimensions	2390: 7.5" H x 19.6" W x 11.3" D; 14.8 lbs. 2391: 7.5" H x 25.2" W x 11.3" D; 18.7 lbs.
Burst print speed	200 cps FastDraft (10 cpi); 180 cps draft (10 cpi); 60 cps letter-quality (10 cpi)
Printing characteristics	Impact, original plus up to three copies (up to a thickness of .014 inches)
Resolution	Letter-quality; all-points-addressable (APA) graphics of 360 x 360 dpi
Pitch	10, 12, 15, 17, 20, 24 and proportional spacing
Font selection	Eight resident fonts: six letter-quality (Courier, Gothic, Orator, Presentor, Prestige, Script), draft and FastDraft; optional: Quickwriter fonts, enhanced letter-quality fonts
Character set	Full 252 IBM PC or PS/2 character set, resident
Print enhancements	Shadow, outline, italics, double-high, double-wide, superscript, subscript, bold, overscore and underscore
Maximum print line	2390: 8"; 2391: 13.6"
Paper handling	Friction feed; movable push/pull tractors; bottom/front paper feed; four-part forms; cut sheets and continuous forms; paper parking; document on demand; labels and envelopes; Auto Sheet Feed (optional)
Index speed	3 inches per second
Index increment	1/360-inch
Print buffer	32K standard
Download memory	32K Volatile Memory (optional); 32K Non-Volatile Memory (optional)
Interface	IBM PC parallel interface; optional serial interface
Supplies	Reinking fabric ribbon; ribbon yield 3.5 million characters[1] (in draft mode)
Operator controls	Easy to use with most commonly used print functions accessible through control panel: letter-quality, draft and FastDraft; variable pitch; paper park; font/pitch lock
Warranty	Limited; two years

A Product of Lexmark

© 1991 Lexmark International, Inc.

Lexmark International, Inc.
740 New Circle Road
Lexington, KY 40511

Printed in the United States of America
8-91
All Rights Reserved

[1] Actual yield varies depending on user's quality expectations, applications, pitch, and other variables.

® IBM, Proprinter and Quickwriter are registered trademarks of International Business Machines Corporation in the United States and/or other countries and are used under license. PS/2 is a registered trademark of International Business Machines Corporation. Epson is a registered trademark of Seiko Epson Corporation.

™ Lexmark is a trademark of Lexmark International, Inc.

References in this publication to IBM products or services do not imply that Lexmark intends to make them available outside the United States.

IBM printers are designed and distributed by Lexmark International, Inc., under license from International Business Machines Corporation.

G221-3168-00

The Straight-Paper-Path, Flat-Out-Reliable IBM Personal Printer Series II